



Kit, Seal Replacement (#B91548-1) Removal & Repair Instructions for 50GPM Nozzle Model 50E701

Kit, Seal Replacement (#B91548-1) content:

- Seal Spring B78705-6
- Seal Retainer B84398-1
- Retainer Ring 93223-112




Tools Required:

- Retainer Ring Pliers




STEP 1

Push the nozzle handles all the way up and put on the flat surface nose piece facing up

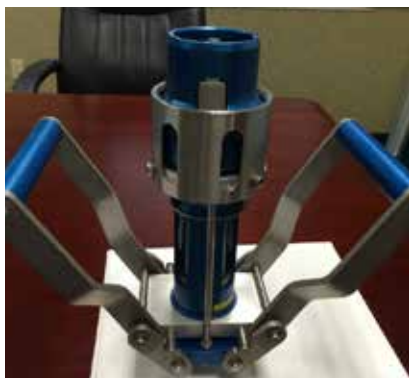

STEP 2

Remove Retainer Ring (93223-112) using Retainer Ring Pliers

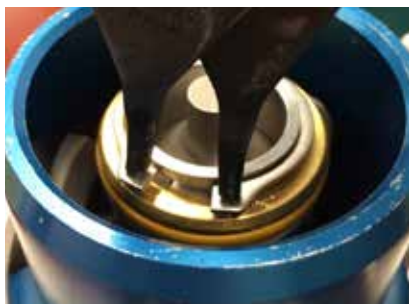

****See reverse side for Steps 3 through 6***

STEP 3

Remove Brass Seal Retainer (B84398-1)



STEP 4

Remove used Seal Spring (B78705-6)



STEP 5

Carefully install new Seal Spring (B78705-6)

Note: Pay Attention to direction of seal opening. It has to be face up (see photo)



STEP 6

Reassembly in the reverse order



PROPRIETARY AND CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF JC CARTER LLC. ANY REPRODUCTION IN PART AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF JC CARTER LLC IS PROHIBITED